



# SLR2000

## TECHNICAL DATA

The information contained within this Technical Data Sheet, details product description and performance values, information of the product and how to safely handle and use the product in the workplace. Each user of this product should read the MSDS and consider the information in the context of how the product will be handled and used in the workplace including in conjunction with other products. If clarification or further information is needed to ensure that an appropriate risk assessment can be made, the user should contact Demtech Australia Pty Ltd. Demtech Australia Pty Ltd makes no representation as to the completeness and accuracy of the data contained in this data sheet. It is the user's obligation to evaluate and use this product safely, and to comply with all relevant Federal, State and Local Government laws and regulations. Demtech Australia Pty Ltd shall not be responsible for loss, damage or injury resulting from reliance upon or failure to adhere to any recommendation or information contained herein, from abnormal use of the material, or any hazard inherent in the nature of the material.

### DESCRIPTION

Cureflex® SLR2000 is a Class III waterproof membrane that complies with AS/NZS 4858:2004, AS3740:2021 and ASA4654.1

- Ready for immediate use and suitable for both interior and exterior applications.
- Strong adhesion properties yet remains extremely flexible after curing.
- Designed to withstand water retention and permanently wet conditions.


When fully cured, the unique formulation also provides an excellent compatible surface for bonding with other construction materials such as Cureflex® TX88 Tile Adhesive, SD35 Premix Screed, SG40 Self Leveller and more...

### PHYSICAL PROPERTIES

<b>Appearance</b>	Wet - Violet liquid paste Dry - Violet rubber film
<b>Odour</b>	Faint odour
<b>Vapour Pressure</b>	As for water
<b>Specific gravity</b>	1.46kg/L
<b>Solid content</b>	74%
<b>Solubility (in water)</b>	Completely miscible
<b>Evaporation rate</b>	Slower than butyl acetate
<b>Vapour density</b>	Heavier than air (air = 1) < 1 water
<b>Stability</b>	Anionic - Considered stable
<b>Hazardous polymerisation</b>	Will not occur
<b>Materials to avoid</b>	Strong acids and oxidizing agents



**CODEMARK®**  
Australia  
Certificate CM20304

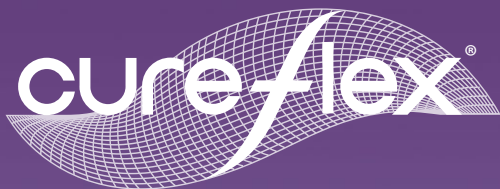

# SLR2000


## TECHNICAL DATA

### TYPICAL ANALYSIS & TEST RESULTS AS/NZS 4858-2004

<b>Classification</b>	Class III
<b>Elongation</b>	364%
<b>Water Absorption</b>	2.14%
<b>Vapour Transmission</b>	1.62g
<b>Tensile Strength</b>	0.54 MPa
<b>Water Immersion</b>	Up to 56 days - Pass
<b>Detergent Immersion</b>	Up to 56 days - Pass
<b>Bleach Immersion</b>	Up to 56 days - Pass
<b>Heat Ageing</b>	Pass
<b>Cyclic Movement</b>	Pass
<b>Ageing Resistance</b>	Pass
<b>Light Resistance</b>	Pass
<b>Flexibility Pass</b>	Pass
<b>Minimum Wet Film Thickness</b>	1.5mm
<b>Minimum Dry Film Thickness</b>	1.2mm

### APPLICATION & MIXING INSTRUCTIONS

<b>Use</b>	All substrates must be clean and free from any contaminants. Substrates should also be fastened and well secured as per manufacturer's recommendations. Cureflex® waterproof membrane may be applied using a brush and roller.
<b>Application rate</b>	Apply a minimum of two coats. Achieve a minimum wet film thickness of 1.5mm. Coverage of at least 1.5L/m <sup>2</sup> will form a dry film thickness of approximately 1.2mm. Apply enough material/layers to achieve a minimum dry thickness of 1.2mm.
<b>Mixing</b>	Always stir product before use. Applicator must apply enough coats/layers to meet the minimum micron thickness set out in accordance to the Australian Standard requirements for waterproofing wet areas on residential buildings.
<b>Priming</b>	When applying over porous surfaces, including green slabs/screeds (slab/screed must be cured for at least 7 days) use Cureflex® PG57. When applying to non-porous surfaces use Cureflex® LS151.
<b>Typical use</b>	Substrates: general wet areas, shower bases, recess walls, concrete, screeds, compressed fibre sheeting, water resistant plasterboard sheets and WR board (other), particle board, cement render, masonry, patios, verandas, terraces.
<b>Bond breakers</b>	In high movement junctions use Cureflex® Rubber Joint Bandage or apply Cureflex® HV124 Silane as a fillet.
<b>Curing</b>	Depending on substrate porosity and air temperatures at the time of application, Cureflex® waterproof membrane is normally touch dry in 15 - 20 minutes and completely cured in 24 - 48 hours at an average ambient temperature of 23 °C.
<b>Storage</b>	Store unopened drum undercover in a room type environment away from sunlight and cyclical conditions. Under these conditions product should retain its characteristics for at least 12 months from manufacturing date.
<b>Cleaning</b>	Wash tools with water.

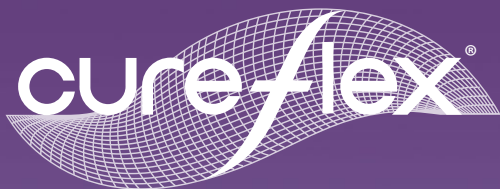

# SLR2000

## TECHNICAL DATA

### OTHER INFORMATION & IMPORTANT NOTICES

<b>Ecology</b>	Avoid contaminating waterways and sewers.
<b>Packaging &amp; Labelling</b>	5L and 15L pails with handles.
<b>Transport</b>	Non-hazardous.
<b>Important</b>	<p>This product is not intended for below ground use.</p> <p>Should not be applied at temperatures below 5 °C. Avoid freezing conditions.</p> <p>Cureflex® SLR2000 is not considered UV stable. Maximum 3 weeks exposure to the elements before covering or re-coating (re-coating will require use of Cureflex® LS151 Primer). Cureflex® UVX4000 should applied as a top-coat if UV resistance is required.</p> <p>It is recommended that the waterproof membrane is tiled over within 21 days of application.</p>

#### **General**

The information contained herein is based on present state of our knowledge and does not guarantee certain properties. Recipients of our products must take responsibility for observing laws and regulations. The information contained within is published free of charge in good faith, based on technical data that Demtech Australia Pty Ltd considers to be reliable.

#### **Disclaimer**

The information within is intended for use by skilled and/or persons with technical knowledge. They are required to make their own assessment and use product at their own risk and discretion. Information contained in this product sheet conforms to the standard detail recommendations and specification for the use of Demtech Australia products as of the date of this document. Demtech Australia Pty Ltd makes no other warranties and assumes no liability, expressed or implied. To ensure that you are using the most up to date information, contact Demtech Australia Pty Ltd.

### CONTACT POINTS

#### **Technical Department**

Demtech Australia Pty Ltd (ABN 91 131 136 706)  
16 Logis Blvd, Dandenong South VIC 3175 Australia  
Website: [www.demtech.com.au](http://www.demtech.com.au)  
Technical Support: 1300 300 090

#### **Australian Poisons Information Centre**

13 11 26

#### **Police & Fire Brigade**

000