

FC SHEETING

FLOORING BOARD

The information contained within this Technical Data Sheet, details product description, health and safety hazard information of the product and how to safely handle and use the product in the workplace. Also refer to the MSDS for more information. Each user of this product should read the MSDS and consider the information in the context of how the product will be handled and used in the workplace including in conjunction with other products. If clarification or further information is needed to ensure that an appropriate risk assessment can be made, the user should contact Demtech Australia Pty Ltd. Demtech Australia Pty Ltd makes no representation as to the completeness and accuracy of the data contained within this data sheet. It is the user's obligation to evaluate and use this product safely, and to comply with all relevant Federal, State and Local Government laws and regulations. Demtech Australia Pty Ltd shall not be responsible for loss, damage or injury resulting from reliance upon or failure to adhere to any recommendation or information contained herein, from abnormal use of the material, or any hazard inherent in the nature of the material.


DESCRIPTION

Flooring Board is a substrate specifically designed for external flooring applications such as balconies and decks to overlay with tiles. Flooring Board provides a durable, stable and moisture proof substrate. Flooring Board is a 19mm or 22mm thick structural, tongue-and-groove flooring board with primer applied on all six sides.

It has been designed to provide long term durability and impact resistance required for external flooring applications and is the most suitable alternative to other timber based exterior products. It's lighter than traditional 18mm fiber cement board which makes it easier to cut, handle and install.

SPECIFICATION

Length (mm)	2400 and 2700
Width (mm)	600
Thickness (mm)	19 and 22
Density (g/cm ³)	1.25
Diagonal Tolerance (mm)	≤5
Thermal Conductivity (W/(m.k))	0.28
Water Absorption (%)	28
Water Containment (%)	12
Moisture Movement (%)	0.21
Non-combustibility	Class A1
Bending Strength (MPa)	16.5
Asbestos	Asbestos free

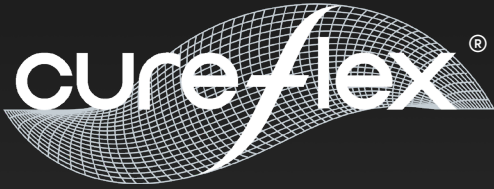

FC SHEETING

FLOORING BOARD

IMPORTANT NOTICES & CONTACT POINTS

General

The information contained herein is based on present state of our knowledge and does not guarantee certain properties. Recipients of our products must take responsibility for observing laws and regulations. The information contained within is published free of charge in good faith and is based on technical data that Demtech Australia Pty Ltd considers to be reliable.

Disclaimer

The information within is intended for use by skilled and/or persons with technical knowledge. They required to make their own assessment and use product at their own risk and discretion. Information contained in this product sheet conforms to the standard detail recommendations and specification for the use of Demtech Australia products as of the date of this document. Demtech Australia Pty Ltd make no other warranties and assumes no liability, expressed or implied. To ensure that you are using the most complete and up to date information, contact Demtech Australia Pty Ltd.

Technical Department

Demtech Australia Pty Ltd (ABN 91 131 136 706)
16 Logis Blvd, Dandenong South VIC 3175 Australia
Website: www.demtech.com.au
Technical Support: 1300 300 090

Australian Poisons Information Centre

13 11 26

Police & Fire Brigade

000